



# WELL-X-TROL®

Full Acceptance Bladder Well Tanks: WX-440 and WX-450 Series Non-ASME

150 PSIG Working Pressure

## Construction


Shell	Steel
Full Acceptance Bladder	Heavy Duty Butyl
Bladder Thickness	.100 In. Minimum
System Connection	Malleable Iron (NPTF)
Finish	Red Oxide Primer
Air Valve	Schrader Valve w/EPDM Seats
Factory Precharge	25 PSIG (1.7 bar)

## Performance

Maximum Operating Temperature	240°F (115°C)
Maximum Working Pressure	150 PSIG (10.3 bar)
Warranty	1 Year

## Application

- For use in commercial well water and booster pump systems.
- Replaceable bladder design.
- Sight glass and seismic restraint options available.
- Available with S/S system connection.

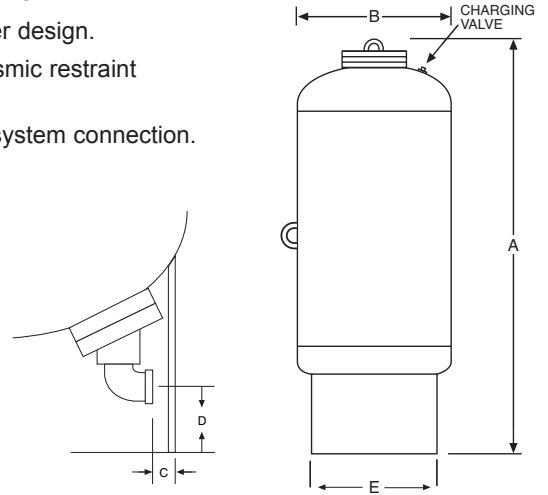

## Non-ASME Models

Model Number	Tank Volume		Max. Accept. Volume		A Tank Height		B Tank Diameter		C Sys. Conn. Inset		D Sys. Conn. Centerline		E Stand Diameter		System Conn. (NPTF)	Shipping Weight	
	Gal	Lit	Gal	Lit	In	mm	In	mm	In	mm	In	mm	In	mm		Lbs	Kg
WX-447	53	200	53	200	45	1143	24	610	2	51	3¾	95	19	483	2	289	131
WX-448	80	300	80	300	59	1498	24	610	2	51	3¾	95	19	483	2	338	153
WX-449	106	400	106	400	73	1854	24	610	2	51	3¾	95	19	483	2	350	159
WX-450	132	500	132	500	87	2210	24	610	2	51	3¾	95	19	483	2	392	178
WX-451	158	600	158	600	73	1854	30	762	3½	89	5½	140	24	610	2	587	266
WX-452	211	800	211	800	91	2311	30	762	3½	89	5½	140	24	610	2	627	284
WX-453	264	1000	264	1000	86	2184	36	914	3¾	98	6¾	171	30	762	3	752	341
WX-454	317	1200	317	1200	98	2489	36	914	3¾	98	6¾	171	30	762	3	840	381
WX-455	370	1400	370	1400	110	2794	36	914	3¾	98	6¾	171	30	762	3	930	422
WX-456	422	1600	422	1600	82	2083	48	1219	7½	191	7¾	181	42	1067	3	1418	643
WX-457	528	2000	528	2000	97	2464	48	1219	7½	191	7¾	181	42	1067	3	1500	680

All dimensions and weights are approximate.

Job Name _____	Notes _____
Engineer _____	_____
Contractor _____	_____
P.O. No. _____	_____
Sales Rep. _____	_____
Model No. _____	_____

